

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 18 TOWNSHIP 17 RANGE 5

DATE: 5-11-02

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 7-8-97

IN. S.P.C. E ZONE NAD '83

NAME: 17051801

N: 519486.6567(m)

E: 70333.9992(m)

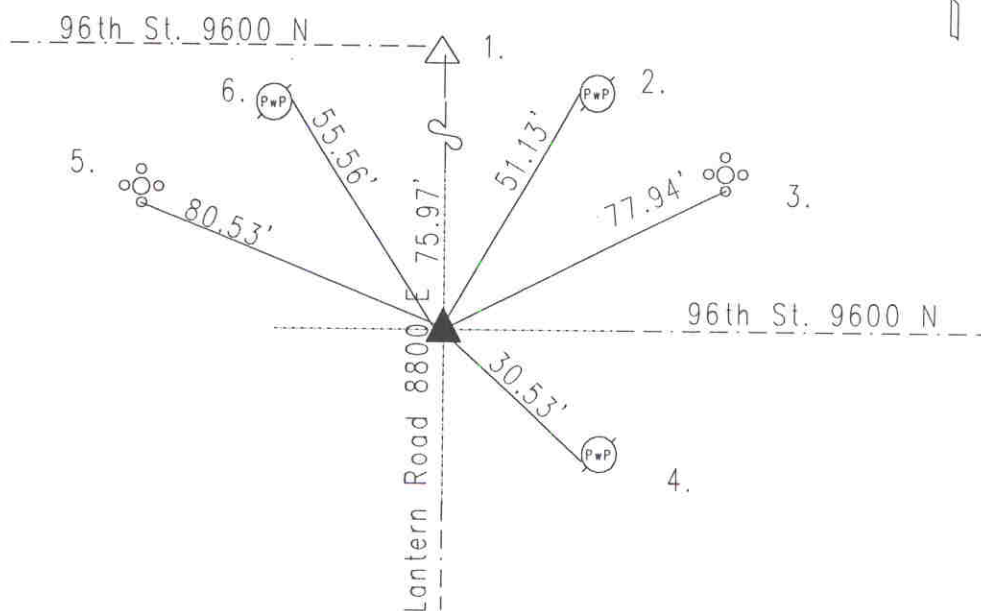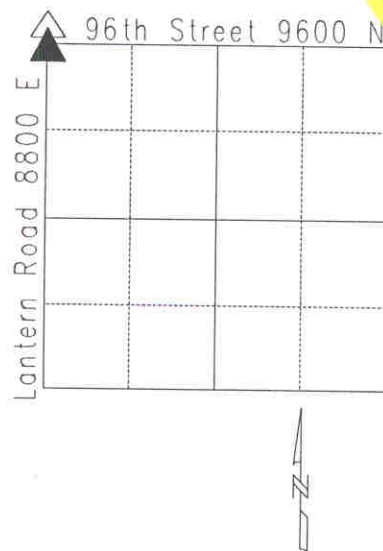

Original post set 1821 by Laughlin, 115 links (75.90') S of NE 13-17-4 with witness 12' beech N 33 links and 12" beech S 33 E 20 links. Legal by Wilson 8-1854 per Lawrence Township Legal Survey Book pg. 8 called corner 'H', but doesn't identify as stone nor other marker. Survey states... "no witness to be found.". 5-15-63 Scherschel tied corner but did not identify monument. No falling given to NE 5-8-75 Fortner called corner iron bolt 4" down. Falling given as 75.00'. Excavated 5-3-82. 2'x2' hole dug 30" deep. 12" iron spike (bolt) fd 4" dn. Blue-grey stone (10"x10"x18") tall. fd 16" down. High pt 0.1' S and 0.15' E of spike. Stone removed Harrison set 'marked section corner' set flush in place of stone. Re-tied 7-8-97. Re-tied 5-11-02 by wilcoxon. 17051801

REF.	DISTANCE	DESCRIPTION
1.	75.97'	Due N to NE 13-17-4 (Harrison)
2.	51.13'	PK nail W PwP#2-181 A 10"up
3.	77.94'	Cut 'x' S-bolt of aluminum pole base
4.	30.53'	PK nail SW PwP#2-181 B 12"up
5.	80.53'	Cut 'x' S-bolt of aluminum pole base
6.	55.56'	PK nail E PwP#9590 10"up